

# 2016 ND Shop Manual

## ND Shop Manual

Search here..



## DOOR TRIM REMOVAL/INSTALLATION

&lt; Previous


Next &gt;

### 2016 – MX-5 – Body and Accessories


#### DOOR TRIM REMOVAL/INSTALLATION

1. Disconnect the negative battery cable. (See [NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.](#))
2. Remove the inner handle cover while detach tabs, pin.


ILLUSTRATION INDICATES LEFT SIDE. (RH SIDE IDENTICAL)

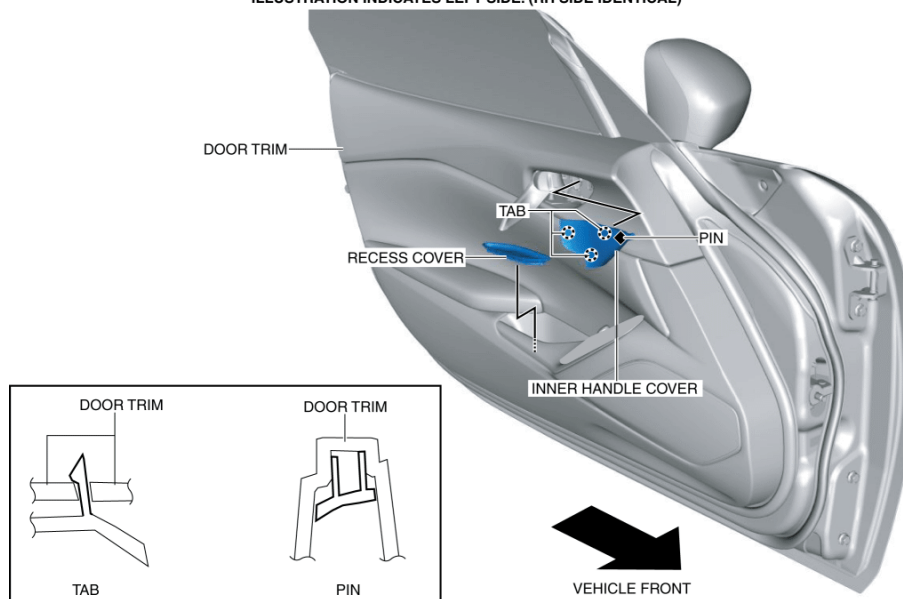


3. Remove the recess cover.
4. Remove the screw.

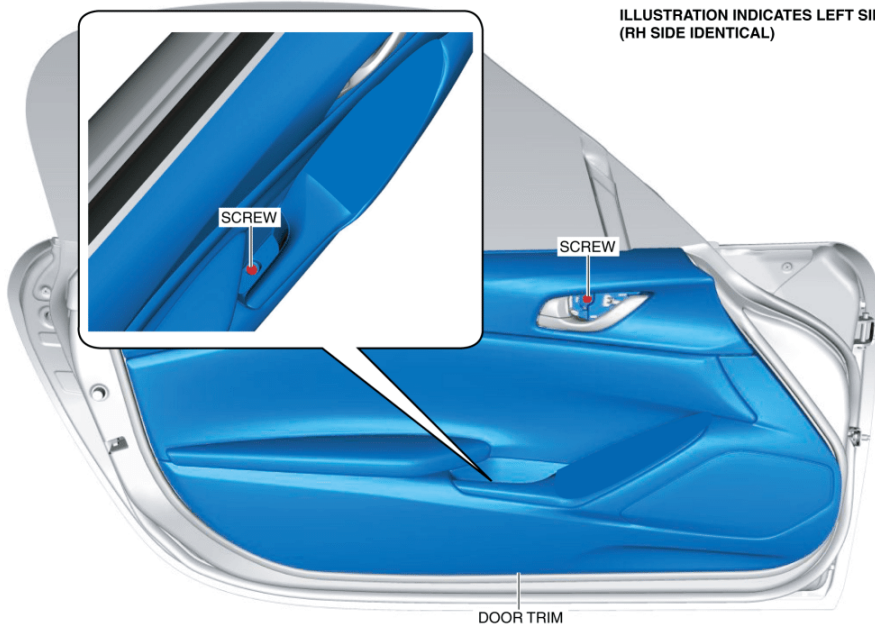


5. Move the door trim in the order of arrows (1), (2), (3), (4),(5) and (6) shown in the figure and detach the clips.

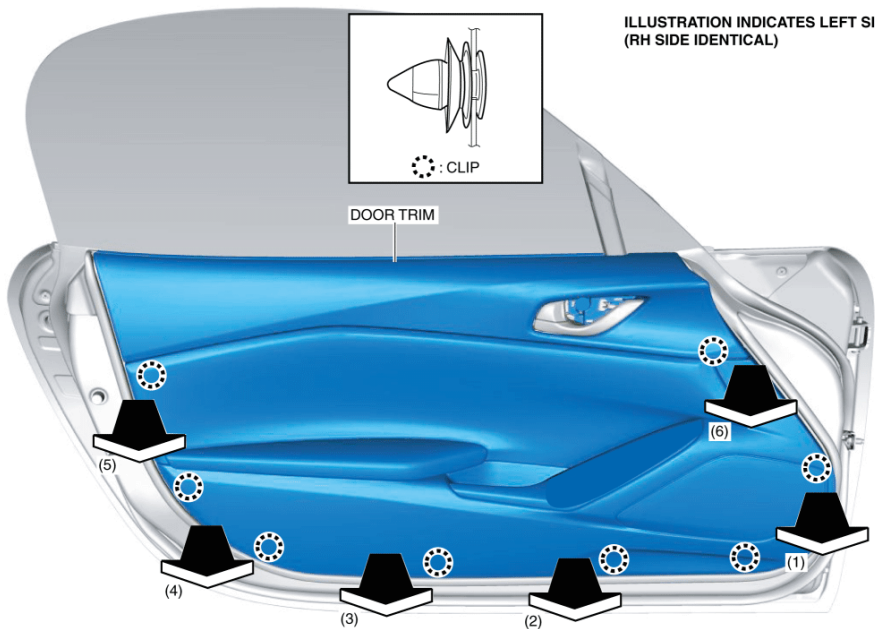

6. Remove the door trim in the direction of the arrow shown in the figure.

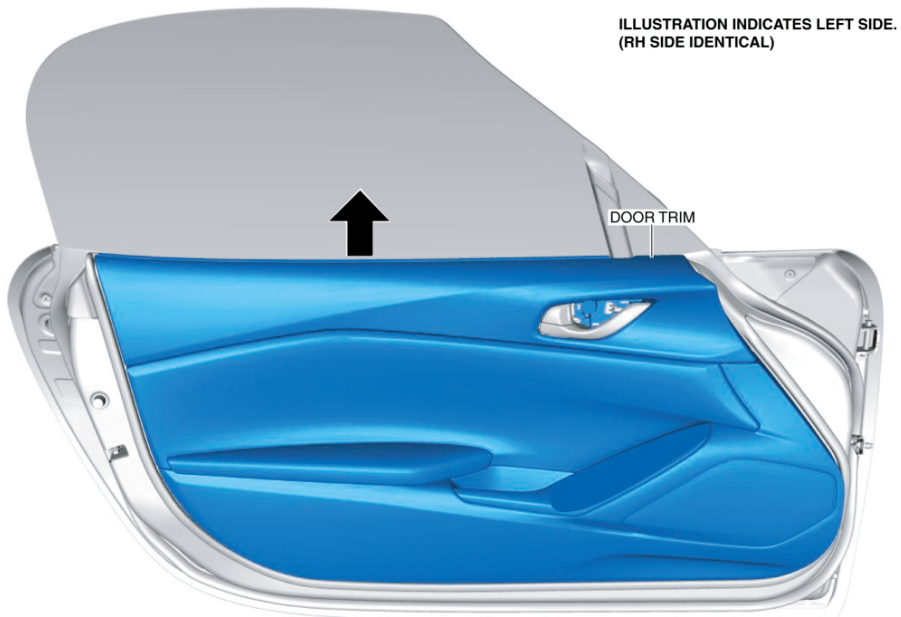

7. Remove tab A in the direction of the arrow (1) shown in the figure.

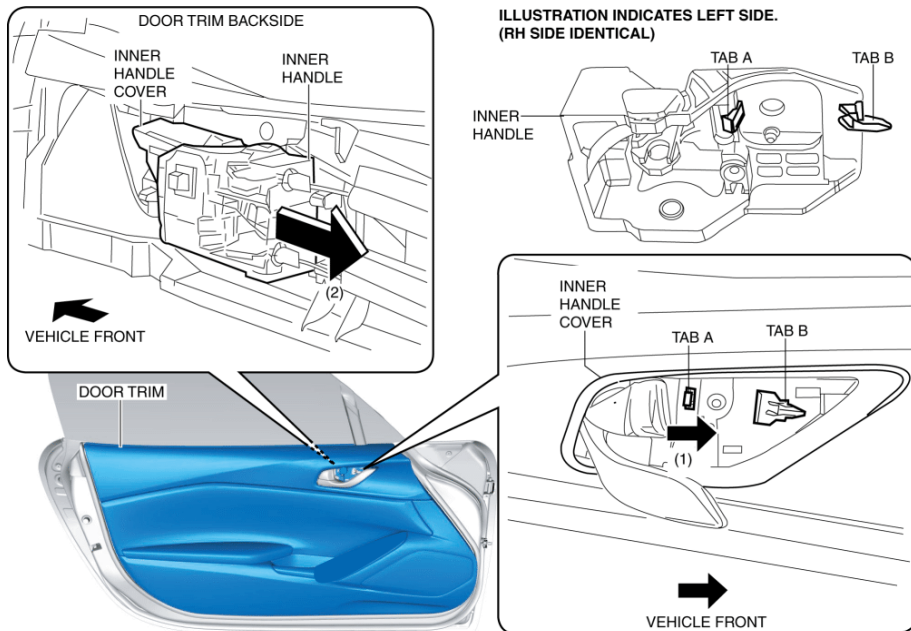

8. Remove the inner handle in the direction of the arrow (2) shown in the figure while detaching tab B.

9. Disconnect the connector.

10. Install in the reverse order of removal.

< Previous      Next >

[Back to Top](#)

© 2014 Mazda North American Operations, U.S.A.

DMCA compliance:  
full.metal.resistor@gmail.com

This site is not affiliated with Mazda, and is intended for personal, noncommercial use only.

The content of our web pages is for general information purposes only and is presented "as is". We give no assurance or warranty regarding the accuracy of the contents.

Readers should do their due diligence and seek the advice of an appropriately certified automotive technician before attempting any steps on this site.

We accept no responsibility for errors, inaccuracies, or omissions found on these pages.

Additionally, we hereby exclude liability for any demands, claims, damages or losses of any kind with regard to any content or information provided on our web-site, including but not limited to incidental or consequential damages, direct or indirect loss, compensatory damages, loss of profits, or otherwise.