

SR - SERIES: 20"



Alt ID	Description
92031	20" SR-Series - Hybrid - Spot/Flood Combo - White


Specifications - Hybrid Optics (Combination)

Model	Alt ID	Weight (lbs)	Watts	AMP Draw	LED's	Raw Lumens*	Lux @ 10m	Beam Distance (m)**	Peak Beam Intensity (cd)**
SR20CW	92031	3.65	70	4.8	20	6400	1068	753.7	142000


Specifications

- 50,000+ Hour lifespan
- 9-36VDC input
- Shock proof
- Updated hybrid optic system-spot,flood,combo
- Specter optics-driving
- Electrically protected against RFI/EMC interference
- Integrated thermal management system
- GORE® Protective Vents
- Unbreakable polycarbonate lens
- Instant on/off
- Waterproof housing
- 6063 Aluminum heatsink
- Anodized and 3800 UV polyester powdercoat
- Sealed deutsch connector
- Reverse polarity protection
- Over/under voltage protection
- Operating temp -40~+145 deg f
- IP68 certified
- MIL810-STDG vibration certified
- ASTMB117 salt/fog certified
- Patented optics (patent #'s 6,986,593 b2, 7,114,832 b2, 7,438,447)

Lux Specifications

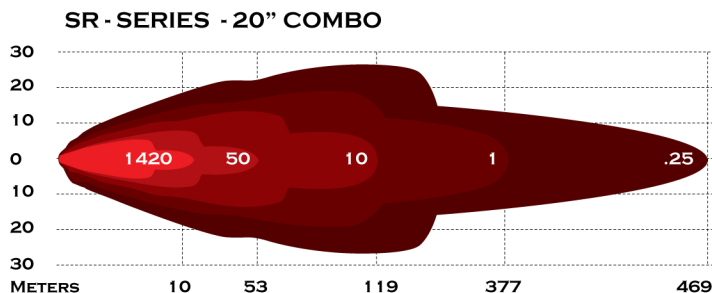

Size Specifications

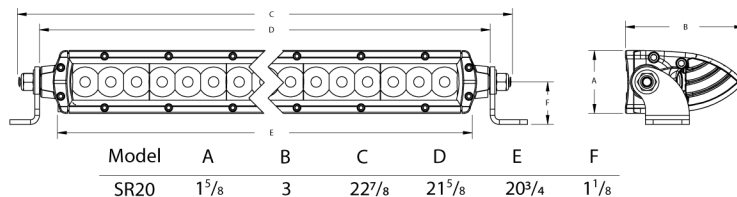

Light Kit Includes

- Plug and play wiring harness with switch
- 2 sets of mounting brackets
- Mounting hardware

* Based on LED manufacturer Specifications
 ** Tested using ANSI/NEMA FL Standards