

# GEARSHADE

---

## FullShade JK Instructions

### Instructions for the GearShade FullShade JK Top:

Start by clipping the center Carabiner or small Bungee Ball cord on the front edge of the GearShade to your center footman loop on the top of the windshield frame. While still clipped, drape the GearShade over the center roll bar. Simply leave it like this while installing the bungee balls and straps.


At one front corner of the Jeep. Start with the strap just behind the corner plastic. Loop the strap under the roll bar and up. The buckle should be orientated to the outside of the vehicle.

Now with one hand grasp the strap, and the other hand grasp the buckle. With a see saw motion work the strap forward,



between the roll bar and the plastic. Keep working it forward as far as you can! Repeat for the opposite side.

Roll bar corner detail, without padding. Right side of vehicle. Looking down.

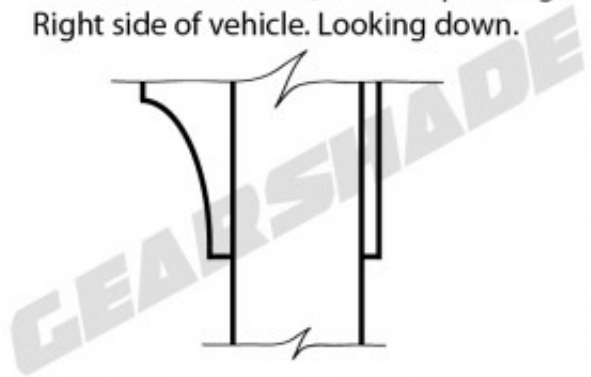

Keep working it forward as far as you can! The strap will have to pass the two flares, one on either side of the roll bar. This is all hidden under the roll bar padding. Repeat for the opposite side.

Take the corner of the GearShade top and put the strap through



Contact us 

the grommet. Place the open end of the strap through the ladder lock part of the buckle. Don't tighten just yet! Attach

the other side, then pull them tight.



Working backwards from the front, pass a bungee through each of the grommet holes down the sides of the GearShade top. Wrapping the cord around the roll bar and back around the ball. While pulling the GearShade snug to the rear.