

Stealthbox®

INSTALLATION GUIDE for the SB-LO-ELS/10W1v2 (2005-Up Elise will not fit right hand-drive models)



This Stealthbox is a product which requires professional installation skills and tools.

Please read this installation guide thoroughly before beginning the project. It will guide you step by step through the installation. Several of the steps in this process may require two people to accomplish.

It is absolutely vital that the enclosure be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems: 1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s) and 2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.

Please enjoy your JL Audio Stealthbox responsibly.

JL AUDIO®
Ahead of the Curve™

www.jlaudio.com

START
HERE



STEP 1: Remove the carpeting and foot rest from the passenger side foot area.

The carpet is held in place by a pair of thumb screws. Unscrew these and remove carpeting

The foot rest is held into place by hook and loop. Pull up and out to remove.

This is a great time to install that car lift that you always wanted. If not, your knees are going to hurt.



STEP 3: Push the Stealthbox® all the way into the foot area.

Place the pair of spacers between the mounting plate and the under side of the dash.




STEP 6: Line up the spacers with the holes from the mounting plate.



STEP 2: Run speaker wire from the amplifier location to the Stealthbox® location.

Place Stealthbox® into passenger side area and attach the speaker wire to the terminal.

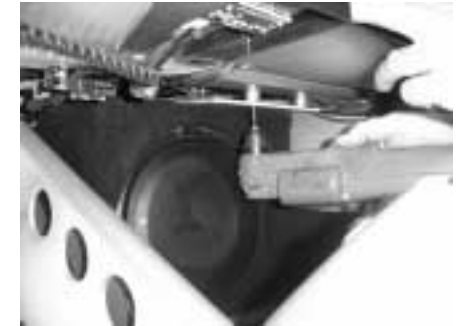

STEP 6: With the supplied pair of #10 self tapping screws. Mount the mounting plate to the under side of the dash.

Do not over tighten the screws, to prevent stripping.

Continued on Next Page →

Cont.
From
Previous
Page



**CONGRATULATIONS!
INSTALL COMPLETE.**

STEP 7: (a) Replace the carpet flooring and thumb screws, from STEP1.

(b) Place the supplied adhesive backed carpeting between the Stealthbox® and the carpet flooring.

Included Hardware:

- 2) 3/4" L x 3/4" OD x 3/8" ID Spacers
- 2) #10 x 1-1/2" L Self Tapping Screws
- 1) 3" x 24" adhesive backed carpet


Difficulty Of Installation:



Specifications:

- Enclosure Type:** Sealed
- Driver Type:** 10w1v2
- Nominal Impedance:** 4Ω
- Cont. Power Handling:** 150Watts

JL Audio recommends using a high quality amplifier such as the JL Audio e2150. The diagram below shows the recommended crossover, infrasonic filter and equalizer settings for the e2150 when being used to power your Stealthbox®.

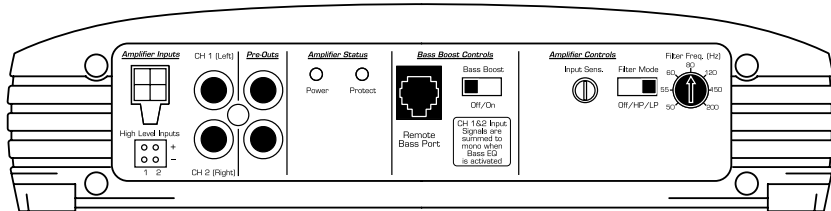

The JL Audio e2150 is a very versatile audio component. Please consult the owner's manual for detailed information about installing and tuning this amplifier.

Mid/High Frequency Driver Information:

Front Location Driver Size:

5.25" coaxial

Applicable JL Audio Products:

TR,VR & XR 525-CXi

also

VR, XR & ZR 525-CSi



Rear Location Driver Size:

5.25"

Applicable JL Audio Products:

TR,VR & XR525-CXi



JL AUDIO®
Ahead of the Curve™

www.jlaudio.com

10369 N. Commerce Pkwy, Miramar, Florida 33025-392

Phone: 954.443.1100

Fax: 954.443.1111

SB-LO-ELS/10W1v2, JL AUDIO, Inc 2006

Page 2

Sheet SKU#011208 2/28/2006