

## Seat Latch Handle Installation Instructions

### Contents:

- 1 Driver side handle*
- 1 Passenger side handle*
- 1 Hex wrench*
- 5 Set screws (1 spare)*

1. Position the driver seat to the half-forward position.




2. If your OEM handle has not pulled out on its own yet, take the OEM handle and pull outward to remove.



3. Match the OEM driver side seat handle with one of the new handles that you have purchased.



4. Using the provided hex wrench, thread in the provided set screws until they are even with the surface of the handle.

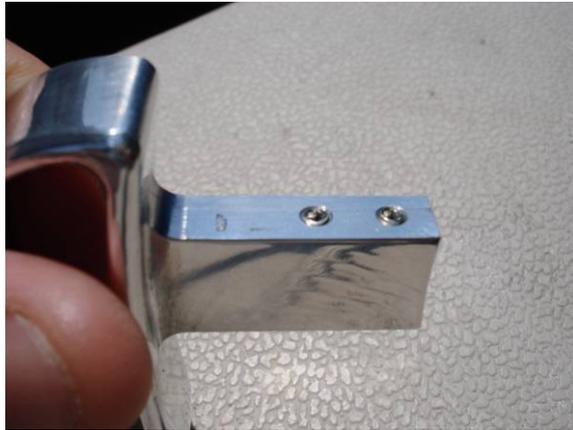

5. Insert new handle to the receiving lever on the seat.



6. Before tightening the handle in place, make sure that it does not rub on the bezel of the seat when moving up and down. You can leave a small gap between the handle and the bezel to prevent any rubbing.



7. Once the handle has been lined up correctly, take the handle and push it down to allow the necessary clearance to tighten the screws with the hex wrench. Be careful not to drop the hex wrench inside the seat when performing this step.



8. Repeat Steps 1-7 for the passenger side



Enjoy!!

Rich