



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

Subject: **Vehicle Inspection, Protection Removal and Detailing
Information**

Group: **00**

Number: **03-08**

Model(s): **All**

2004

Date: **Nov. 4, 2003**

Supersedes T.B. Group 64 Number 00-02 dated Aug. 22, 2000

Supersedes T.B. Group 00 Number 00-11 dated Sept. 28, 2000

Supersedes T.B. Group 44 Number 01-05 dated Aug. 21, 2001

Supersedes T.B. Group 50 Number 01-01 dated Aug. 16, 2001

INDEX OF INFORMATION

- Inspecting vehicle for damage (to be completed within 48 hours of delivery to Dealership) (see page 2)
- Shipping damage (see page 3)
- Solar panel, description and applications (see page 4)
- Detailers Responsibilities (to be completed within 48 hours of delivery to Customer) (see page 6)
- Complete car cover, removal and disposal (see page 8)
- RAPGARD®, removal and disposal (see page 17)
- Paint finish, inspecting for swirl marks (see page 23)
- Exterior glass, cleaning (see page 23)
- Interior cleaning (see page 25)
- Rear floor mats, Installation (see page 26)
- Convertible top instructional hang tag (see page 27)
- New vehicle detailing products (see page 29)

CAUTION!

***Part numbers are for reference only.
Always check with your Parts Dept. for
the latest parts information.***



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

VEHICLE, INSPECTING FOR DAMAGE

When vehicle arrives at Dealership, DO NOT immediately remove complete car cover or RAPGARD® (self adhering plastic covering). Covers should be removed within 48 hours of delivery to the customer, (see note below):

Note:

- ◆ *RAPGARD® must be removed from the vehicle no later than six months after application. See sticker (location on vehicle body varies) for detailed information.*

Within 48 Hours after arrival at Dealer:

COMPLETE CAR COVER

Some vehicles are shipped with a complete car cover.

- Inspect complete cover for damage.

If cover is damaged (torn, cut etc.):

- Remove cover using appropriate steps to allow for inspection of damage (see page 8).

If any shipping damage is found (see “Shipping Damage” on page 3).



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

RAPGARD®

Some vehicles are shipped with a paint protection product called RAPGARD®. This self adhering plastic product is designed to provide protection from all types of industrial fallout, acid rain and rail dust.

- Inspect RAPGARD® for damage or peeling.

Note:

- ◆ *RAPGARD® must be removed from the vehicle no later than six months after application. See sticker (usually on hood but location on vehicle body may vary) for detailed information.*

If RAPGARD® is disturbed (dented, scratched, etc.):

- Remove RAPGARD® using appropriate steps (to allow for inspection of damage).
- If any shipping damage is found (see “Shipping Damage” below).

SHIPPING DAMAGE

- You must note the damage on the Carrier Delivery Receipt, including damage type, extent and location. Failure to note damage on the Carrier Delivery Receipt will result in non-payment of the repair.

Note:

For all transportation issues, refer to Article 8 of the Warranty Policies and Procedures Manual.



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

Solar Panel, Description and Applications

Some vehicles will be equipped with and may arrive at the Dealership with solar panels (to ensure that the battery is at full charge).

- **DO NOT** remove solar panels from vehicles which are equipped with the solar panel!

It is important that these solar panels **REMAIN INSTALLED** on the vehicle until delivery to the Customer. At that time it should be removed and given **FREE of CHARGE** to the Purchaser of that vehicle.

Once solar panel is removed:

- Clean windshield thoroughly.

If a vehicle arrives without a solar panel:

- DO NOT order solar panels as missing equipment.
- IMPORTANT! SEE FOLLOWING NOTES.

Refer to the Owner's Manual for description of the Solar Panel and it's usage after vehicle delivery.

Note:

Please advise the sales dept. to review the Owner's Manual regarding the solar panel including WARNINGS! with the Customer and to explain the following at the time of vehicle delivery:

- ◆ *The solar panel is free of charge to the customer.*
- ◆ *The solar panel is not an option and cannot be ordered separately.*
- ◆ *The solar panel is NOT a part of the vehicle equipment and is NOT a Warranty item!*



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

- ◆ *Vehicles that arrive at the Dealership without a solar panel installed are NOT eligible for a free solar panel.*
- ◆ *The solar panel contains no serviceable parts, should it become damaged or inoperable, it should be disposed of.*
- ◆ *DO NOT use the solar panel for any other application other than described in the Vehicle Owner's Manual.*

WARNING!

Improper use of the solar panel can cause serious injury.

The solar panel becomes warm when it is exposed to sunlight and when it is plugged in. Unplug the solar panel when no longer needed and allow it to cool down before removing it.

Always unplug and remove the solar panel before driving off, otherwise it may impair your visibility.

A solar panel that is loose in the vehicle can cause injury during sudden braking or in an accident.

Always store the solar panel in a secure place when not in use.

Always read and heed the information on the sticker on the back of the solar panel.



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

DETAILERS RESPONSIBILITIES

The Detailer's role

Taking ownership of a vehicle that is clean, shiny and performs as expected goes a long way in Customer satisfaction.

The impact you have on the Volkswagen Customer is immense. You play a vital role in delivering a perfect Volkswagen to your Customers. The delivery process is exciting for our Customers. Your attention to detail will give a Volkswagen Customer a positive experience about his or her new car far beyond that first day of delivery. By preparing a perfectly detailed vehicle to your Customer, you are not only meeting or exceeding your Customer's expectations, you are also helping eliminate any buyer's remorse (that feeling of anxiety people get after making a large or important purchase).

To help you with your detailing role in the perfect delivery process, refer to the Detailer Inspection Checklist (delivered with the vehicle).

Additional copies of these checklists may be ordered from the Volkswagen Technical Literature center on the web at www.vw.dds1td.com or by calling 1-800-544-8021.

Printed pages (non-carbon copies) of the Perfect Delivery procedure can be viewed in the 2004 Service Circular Maintenance Schedule (see VESIS).

Unless otherwise instructed, the completed and signed checklist should be left in the glove box of the vehicle once completed for easy access by the Volkswagen Sales Consultant.



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

Please know that you have a team behind you with excellent products and support to enable you to make a perfect delivery each and every time!

By utilizing the following procedures you will be able to exceed the Customer's expectations and deliver the finest vehicle possible:

Within 48 Business Hours Prior to Delivery, following the Perfect Delivery Detailers Inspection Checklist:

- Rinse vehicle exterior.
- Remove vehicle cover if equipped:
 - Removing complete car cover (see page 8).
 - Removing RAPGARD® (see page 17).

CAUTION!

Always read and follow manufacturer Cautions and Warnings regarding use of products listed in this Technical Bulletin.



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

Complete Car Cover

Some vehicles may be transported in a “Transshield” shipping cover or a “HEILAND” transportation protection cover.

- The “Transshield” shipping cover can be identified as a heavyweight plastic shrink wrap type material.
- The “HEILAND” shipping cover can be identified as a paper or cloth blend type material.

The protective shipping cover protects the entire vehicle surface (including attached components and trim) from contamination and light damage during transport.

Both covers:

- Include a zippered door to access vehicle interior for moving vehicle with cover ON.
- External surfaces resist water, dust and dirt.

Note:

After being opened to allow driver access to move the vehicle, close the cover immediately to ensure continued protection against contamination from industrial materials.

- ◆ Accessing vehicle interior (both styles of cover) see page 9.
- ◆ Removing “Transshield” covers see page 10.
- ◆ Removing “HEILAND” covers see page 13.

Note:

While the illustrations shown in this TB may not reflect the model you are working on, the procedures for cover removal are the same.



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information

When vehicle arrives at Dealership, DO NOT immediately remove cover (to be removed at PDI):

- Inspect cover for damage.

If cover is damaged (torn, cut etc.):

- Remove cover using appropriate steps (to allow for inspection of damage).
- You must note the damage on the Carrier Delivery Receipt, including damage type, extent and location. Failure to note damage on the Carrier Delivery Receipt will result in non-payment of the repair.

Note:

For all transportation issues, refer to Article 8 of the Warranty Policies and Procedures Manual.



Preparing vehicle for entry using access door (both styles of cover)

- ◀ - Unzip door zipper.
- Fold cover upward to top of vehicle.
- ◆ Door can now be opened, making it possible to move vehicle.

Note:

After being opened to allow driver access to move the vehicle, close the cover immediately to ensure continued protection against contamination from industrial materials.



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



“Transshield” Shipping cover, removing

With cover access door unzipped and folded on top of vehicle (as previously described for “Accessing vehicle interior”).

- Open driver’s door and release hood latch.
- ◀ – Remove cover from sill (rocker panel).
- Release elastic from head rest and material from door latch.
- Remove material from door area, then, close door (making sure door does not trap any material from cover when closed).
- Unzip hood zipper.
- Fold hood access flap towards rear of vehicle over the windshield.
- ◀ – Unclip strap across engine.
- Remove hood flap near windshield.
- Remove strap from around left and right mirrors.
- Pull excess material from under-hood area (down towards bumper, then close hood (making sure hood does not trap any material from cover when closed).






Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information

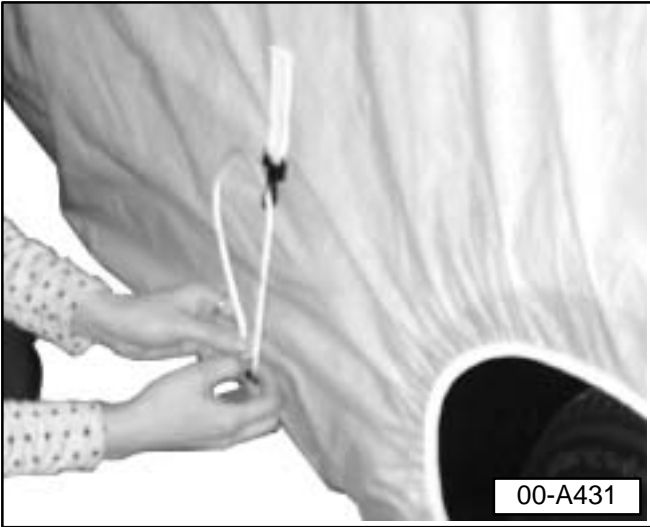

- Remove rope on driver side of vehicle by unclipping from hook on side of cover.
- ◀ - Remove rope loop on passenger side of vehicle by unclipping from hook on side of cover.
- On passenger side of vehicle, pull rope from under vehicle and roll into pockets on cover material.



- ◀ - Remove tape from area around the windshield (fold to itself or to cover).



- ◀ - With the aid of an assistant, pull material from under rear bumper as shown.



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



- ◀ – Pulling outward, continue pulling cover up and over rear of vehicle.
- Roll cover towards hood.



- ◀ – Lift cover forward over hood and remove from vehicle.

Shipping cover should now be disposed of (preferably by recycling, to allow material recovery).

CAUTION!

Cover must be removed and disposed of at PDI.

DO NOT reinstall cover!

DO NOT reuse cover!



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



“HEILAND” Shipping cover, removing

With cover access door unzipped and folded on top of vehicle (as previously described for “Accessing vehicle interior”).

- ◀ – Open driver’s door, remove material from carpet and sill (rocker panel).



- ◀ – Remove tape from area around windshield evenly using both hands (fold to itself or to cover).



- ◀ – Remove door edge protection evenly using both hands.
- Remove material from door area, then, close door (making sure door does not trap any material from cover when closed).
- Zip cover closed.




Important!

Please give copies to all your VW Detailers

Technical Bulletin


Vehicle Delivery Information

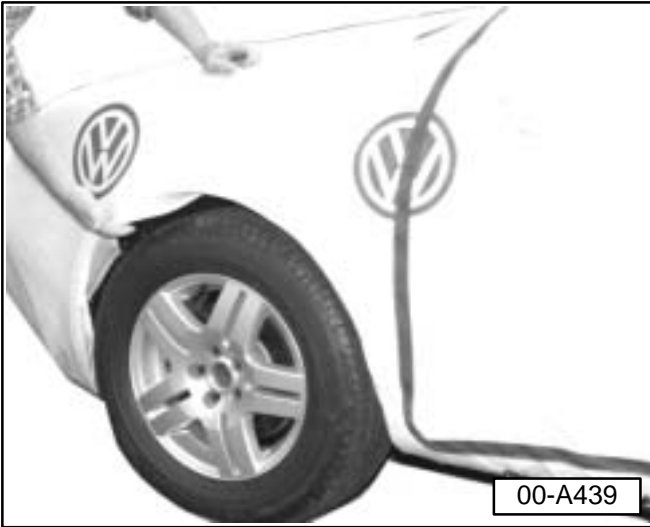

◀ – Fold out wheel housing edges at front and rear wheels.



◀ – Unhook cover hooks at sides, front and rear of vehicle.

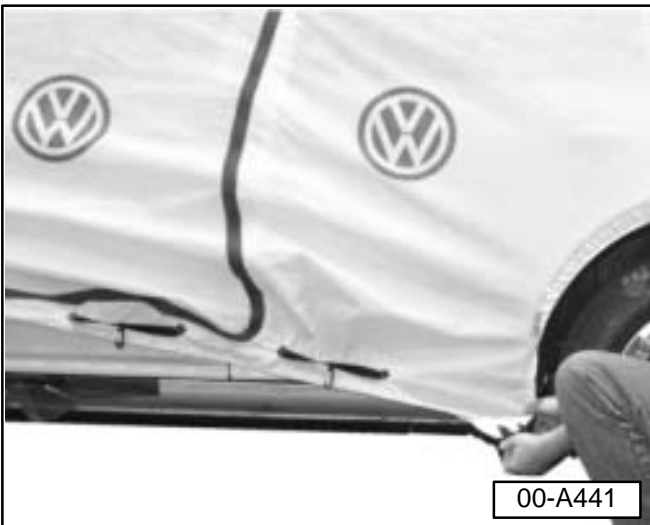

◀ – Unhook corner protection at all wheel housings (remove any contamination that may have accumulated at these areas).



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



- ◀ – With the aid of an assistant, pull front part of cover (at bumper) out and away from bumper, then lift cover up (letting cover rest on hood).



- ◀ – Remove cover from left and right mirrors.



- ◀ – With the aid of an assistant, pull rear part of cover (at rear bumper) out and away from bumper, then lift cover up (letting cover rest on roof).



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



- ◀ – Fold left and right sides of cover up on roof as shown (ensuring that hooks do not contact the vehicle paint during the following step).
- Roll cover towards hood.



- ◀ – Lift cover forward from hood and remove from vehicle.

Shipping cover should now be disposed of (preferably by recycling, to allow material recovery).

CAUTION!

Cover must be removed and disposed of at PDI.

DO NOT reinstall cover!

DO NOT reuse cover!



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

RAPGARD® REMOVAL AND DISPOSAL

Note:

- ◆ *RAPGARD® must be removed from the vehicle no later than six months after application. See sticker (location on vehicle body varies) for detailed information.*

RAPGARD®, Removal

- ◆ Vehicle must be at room temperature.
- ◆ The ideal body surface temperature for RAPGARD® removal is 60°F (15.5° C) to 80°F (26.6° C).

If body surface temperatures are below 60°F (15.5° C) or above 80°F (26.6° C) then:

- Removal procedure should be performed indoors after surface temperatures have been allowed to stabilize within the given range.
- Rinse vehicle thoroughly with water to remove surface dirt or dust and to help stabilize body surface temperatures.
- Starting at the corners of each panel, carefully remove RAPGARD® from vehicle.

RAPGARD® Disposal

RAPGARD® can be disposed as normal paper waste. If unsure about proper disposal procedures in your area, check local regulations.

RAPGARD®, Paint Inspection After Removal

- Inspect painted surfaces under one of the following lighting conditions:
 - ◆ Indoors under fluorescent lighting.
 - ◆ Outdoors under bright sunlight.



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

Important!:

If any defects on the exterior have been identified (scratches, dings, dents and other types of body damage):

- Contact your Supervisor and arrange to repair defects immediately.

Note:

After removal of RAPGARD[®], some vehicles may exhibit temporary paint discoloration or paint swelling (caused by trapped moisture under the RAPGARD[®]).

- ◆ *This temporary swelling is caused by the paint finish absorbing moisture trapped under the RAPGARD[®] film.*
- ◆ *This swelling will disappear with exposure to the sun or heat lamps within 2 – 3 hours. Severe Paint swelling may require 2 – 3 days to recover.*

DO NOT buff or refinish paint for this condition!

Note:

Paint discoloration (looks like shaded or dark magic marker lines) can be removed with a heat gun using the following procedure:

- Hold heat gun approximately 3 in. away from affected paint surfaces and apply heat using slow oscillating motions until discoloration is gone.
- If discoloration remains, wipe the heated area with Isopropyl alcohol and repeat procedure to increase surface drying.

If no discoloration is evident or once discoloration is removed, inspect and remove any adhesive residue using the following products:



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



RAPGARD®, adhesive residue removal

Light lines of adhesive residue can be removed with Perfect-It® non-abrasive polishing products for light or dark colored vehicles.

◀ 3M® Perfect-It Foam Polishing Pad Glaze (for light colored vehicles):

Part Number	Container Size	Containers per Case
MMM039109DSP	quart	6
For bulk quantities see page 29		

3M® Perfect-It Foam Polishing Pad Glaze (for dark colored vehicles):

Part Number	Container Size	Containers per Case
MMM039009DSP	quart	6
For bulk quantities see page 29		



◀ 3M® General Purpose Adhesive Cleaner:

Thick lines of adhesive residue can be removed with a general purpose adhesive cleaner.

Part Number	Container Size	Containers per Case
MMM008987DSP	15 oz.	6
For bulk quantities see page 29		

With paint finish inspected for discoloration and adhesive residue removed:

- Go to "Detailer responsibilities exterior cont." (see page 20).



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information

DETAILER RESPONSIBILITIES, EXTERIOR Cont.



◀ 3M® Car Wash Shampoo Concentrate

- Wash and dry vehicle exterior.

Part Number	Container Size	Containers per Case
MMM039000DSP	16 oz.	6
For bulk quantities see page 29		

Note:

DO NOT wash or dry vehicle in direct sunlight. Rapid water/soap solution evaporation may form “water spots” on the paint surface.



◀ VW Car Wash Mitt

The plush fibers carry an abundance of soap and water to help loosen and lift away dirt and grime from the vehicle’s surface.

Part Number	Container Size	Containers per Case
ZVW 911 380	N/A	1

Once vehicle has been thoroughly washed:

- Inspect interior floors and glass for water leaks.
- Inspect paint surface, moldings and glass.

Important!:

If any defects on the exterior have been identified (scratches, dings, dents and other types of body damage):

- Contact your Supervisor and arrange to repair defects immediately.

If no exterior defects are found:

- Go to “Wheels & Tires, cleaning” (see page 21).



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



WHEELS & TIRES, CLEANING

- Remove protective cover from wheels (if applicable).

Thick lines of adhesive residue can be removed with general purpose adhesive cleaner.

◀ 3M® General Purpose Adhesive Cleaner:

- Remove any adhesive residue.

Part Number	Container Size	Containers per Case
MMM008987DSP	15 oz.	6
For bulk quantities see page 29		



◀ VW Alloy Wheel Cleaner

- Clean alloy wheels and tires.

Alloy wheels can be cleaned with ease without damaging the finish, using Alloy wheel cleaner.

Part Number	Container Size	Containers per Case
ZVW 902 106	18 oz.	12

With wheels & tires cleaned:

- Go to “Exterior finish, applying paste wax” (see page 22).



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



EXTERIOR FINISH, APPLYING PASTE WAX

Finish can be significantly improved without the use of harsh polishing compounds and high speed buffing.

Each vehicle must be waxed within 48 hours prior to delivery to the Customer.

◀ 3M® Perfect-It Show Car Paste Wax:

- Protect the vehicle paint surface by applying 3M Perfect-It® Paste Wax.
- Apply wax to panel sized area (door, fender etc.) using a firm circular motion.

Part Number	Container Size	Containers per Case
MMM039526DSP	10.5 oz. Net. Wt.	6



◀ 3M® Perfect-It III Detailing Cloth:

After wax dries to a hazy finish, use this cloth to polish the finish by hand.

Part Number	Container Size	Containers per Case
MMM006016DSP	6 Cloths per package	Packages per case 6
For bulk quantities see page 29		

With 3M Perfect-It® Paste Wax applied:

- Go to "Paint finish, inspecting for swirl marks" (see page 23).



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information

PAINT FINISH, INSPECTING FOR SWIRL MARKS

- Inspect vehicle paint finish for swirl marks.

If no swirl marks are found:

- Go to "Exterior glass, cleaning".

If swirl marks are found:

- Contact your Supervisor.

EXTERIOR GLASS, CLEANING

Residue on windshield, i.e., industrial fallout (rough surface, snake skin appearance, streaking).

With vehicle exterior (including all glass surfaces) washed and dried, perform the following:

- ◀ - Apply 3M® Perfect-It Gloss Enhancer to windshield.



00-A340

Part Number	Container Size	Containers per Case
MMM039034DSP	16 oz.	6
For bulk quantities see page 29		



00-A341

- ◀ Using 1/3 of a bar of 3M® Perfect-It III Cleaner Clay:

- Flatten clay into a small palm size pancake.
- With clay flat between windshield and your hand, rub windshield (with light friction) using a vertical motion (up/down) across windshield).

Ensure glass stays moist with Gloss Enhancer. (Clay can be flipped over when dirty.)

Part Number	Container Size	Containers per Case
MMM038070DSP	7 oz.	6



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

- Wipe dry with a clean/dry towel.

Note:

It may be necessary to apply a small amount of Gloss Enhancer to the glass again when wiping dry.

- Inspect glass surface using the palm of your hand (feel for rough surface).

If rough surface is found, repeat process until clean.

IMPORTANT!

The Cleaner Clay can be reused several times by kneading the clay, however;

3M® Perfect-It III Cleaner Clay used on glass surface (mixed with Gloss Enhancer) must now only be used on glass surfaces.

DO NOT use on exterior body surfaces of the vehicle, due to the Gloss Enhancer being mixed in with the clay.

With glass surfaces cleaned:

- Go to wiper blades:

WIPER BLADES

- Install permanent wiper blades or remove temporary wiper blades (as necessary).

With permanent wiper blades installed or temporary wiper blades removed:

- Go to Engine compartment, cleaning:

ENGINE COMPARTMENT, CLEANING

- Clean (wipe down) engine compartment.

IMPORTANT!

DO NOT use chemicals containing silicone!

With engine compartment cleaned:

Go to “Interior, prior to delivery” (see page 25)



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information

INTERIOR, PRIOR TO DELIVERY

- Clean all interior glass / mirrors / sunroof (if applicable).
- Remove all trim protection, coverings and decals.
- Remove decals, stickers and shipping labels.

Note:

DO NOT remove Air Bag Warning Triangle/Warning Labels.

- Inspect all interior surfaces/compartments (including upholstery, sun visors/headliner) clean as required (see below). Also see T.B. Group 70 number 00-01 dated Aug. 23, 2000.



00-A342

◆ All Purpose Cleaner:

Use this product to clean interior fabrics, vinyls and plastics.

Part Number	Container Size	Containers per Case
ZVW 177 203	16 oz.	24



00-A344

◆ 3M® Scotch-Brite Type T Scuff Sponge:

Use with a small amount of soapy water to clean stubborn dirt on leather upholstery. Also see T.B. Group 70 number 00-02 dated Aug. 23, 2000.

Part Number	Container Size	Containers per Case
MMM007439DSP	Sponges per package 10	30





Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information

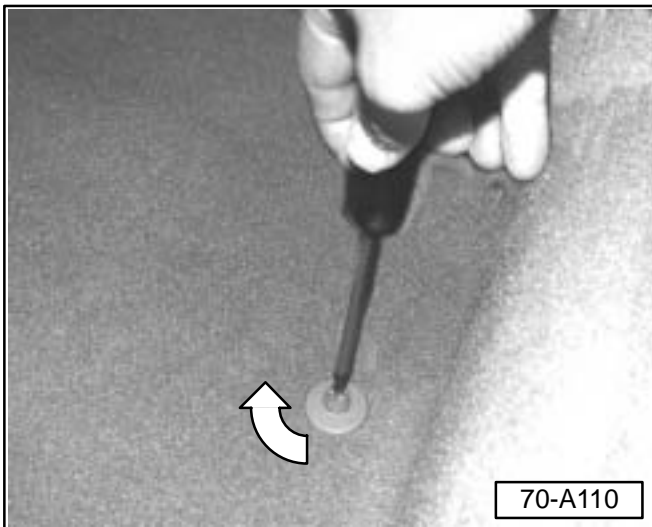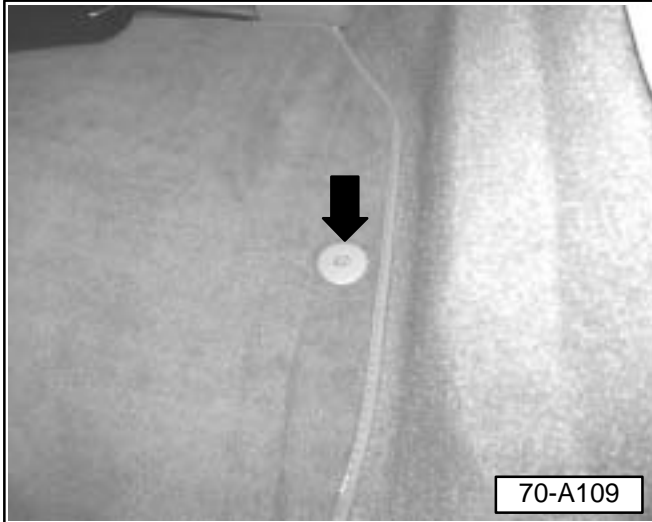

Rear Floor Mats, Installation During Detailer Inspection

Dealers are responsible to install rear floor mats prior to delivery to the customer. See the Detailers Inspection Checklist.

Vehicles contain either “fixed” anchors or “screw” anchors. For vehicles with “fixed” anchors, the anchors will already be installed on floor of vehicle.

- Line up hole in mat, with “fixed” anchor on floor.
- ◀ – Push down on floor mat to snap and secure mat in place.

If vehicle contains “screw” anchors, the “screw” anchor will be included in the Bi-pack.

- Loosely place “screw” anchor into floor mat. Do not snap in!
- Place floor mat into position in the rear footwell area (to locate screw anchor).
- Remove floor mat, leaving screw anchor in place.
- ◀ – Thread screw into carpet of vehicle, using a Phillips screwdriver.
- Line up hole in mat, with “screw” anchor on floor.
- Push down on floor mat to snap and secure mat in place.

Note:

Ensure that the anchors are the correct color.



Important!

Please give copies to all your VW Detailers

Technical Bulletin

Vehicle Delivery Information



Convertible Top Instructional Hang Tag

To help familiarize the customer in the proper procedure for opening and closing the convertible top latch mechanism:

◀ When performing the PDI, Technician must install the convertible top instructional hang tag on the interior rear view mirror.

The hang tag as shown, was announced in Literature and Supply Service Circular VLS-02-08 dated Sept. 26, 2002 and is located in the New Beetle Convertible Owner's Literature package.

Interior Cleaning Cont.

- Check for excessive grease on seat tracks and clean as necessary.
- Vacuum carpet.
- Check luggage compartment (vacuum if necessary),
- Check color match of front/rear floor mats.
- Install mats including locking clips/tabs if applicable.
- Perform final inspection in day light or under fluorescent light to insure final cleanliness and that vehicle is free from visual defects.
- Complete and sign the Detailers Inspection Checklist.
- Place the completed Checklist into the vehicles glove compartment.
- Deliver the vehicle to the Sales Department.



Important!

Please give copies to all
your VW Detailers

Technical Bulletin

Vehicle Delivery Information

New vehicle Detailing products

Some 3M® products are available in larger bulk quantities.

“3M”, “Perfect-It” and “Scotch-Brite” are registered trademarks of 3M.

3M® products are available through Volkswagen’s parts system in the U.S. and Canada. Please see the attached Volkswagen order list which contains 3M part Numbers as well. Consult your parts department for ordering.

Note:

For part number ordering clarification, the part numbers should be entered as follows when ordering:

- ◆ Complete part number without spaces then insert 2 spaces just before the DSP designation. eg. MMM008987 DSP.

CAUTION!

Always read and follow manufacturer Cautions and Warnings regarding use of product.



Technical

Vehicle Delivery

Description	VoA Part Number	Unit size
3M [®] Perfect-It foam polishing pad glaze (light colored vehicles)	MMM039109 DSP	quart
	MMM005995 DSP	quart
	MMM039819 DSP	1 gallon
3M [®] Perfect-It foam polishing pad glaze (dark colored vehicles)	MMM039009 DSP	quart
	MMM005996 DSP	quart
	MMM039809 DSP	1 gallon
3M [®] Car Wash Shampoo	MMM039000 DSP	16 oz.
	MMM039800 DSP	1 gallon
VW Car Wash Mitt	ZVW911380	1
VW Alloy Wheel Cleaner	ZVW902106	18 oz.
All Purpose Cleaner	ZVW177203	16 oz.
3M [®] Perfect-It Show Car Paste Wax	MMM039526 DSP	10.5 oz.
3M [®] Perfect-It III Auto Detailing Cloth Yellow	MMM006016 DSP	6/pkg
	MMM006017 DSP	50/cs
	MMM039016 DSP	each
3M [®] General Purpose Adhesive Cleaner	MMM008987 DSP	15 oz.
	MMM008984 DSP	quart
3M [®] Perfect-It III Cleaner Clay	MMM038070 DSP	7 oz.
3M [®] Perfect-It Gloss Enhancer	MMM039034 DSP	16 oz.
	MMM039434 DSP	4 oz.
	MMM039834 DSP	1 gallon
3M [®] Scotch-Brite Type T Scuff Sponge	MMM007439 DSP	10 per



Technical

Vehicle Delivery

Additional Items available for Drop shipment

Description	VoA Part Number	Unit size
3M [®] Spray Trigger Nozzle Head	MMM037717 DSP	each
3M [®] All Purpose Cleaner and Degreaser	MMM038050 DSP	1 gallon
	MMM038051 DSP	5 lb. pack
	MMM038052 DSP	55 gallon
3M [®] Heavy Duty Wheel Cleaner	MMM038074 DSP	1 gallon
	MMM038075 DSP	5 gallon
	MMM038076 DSP	55 gallon
3M [®] Car Wash Soap	MMM038077 DSP	1 gallon
	MMM038078 DSP	5 gallon
	MMM038079 DSP	55 gallon
3M [®] Glass Cleaner	MMM008888 DSP	19 oz.
	MMM038099 DSP	1 gallon
	MMM038100 DSP	5 gallon
	MMM038101 DSP	55 gallon
3M [®] Detail Wax	MMM038111 DSP	1 gallon
3M [®] Gloss Enhancer	MMM038113 DSP	1 gallon
	MMM038114 DSP	5 gallon
	MMM038115 DSP	55 gallon



Technical

Vehicle Delivery

Additional Items available for Drop shipment

Description	VoA Part Number	Unit size
3M [®] Premium Glass Cleaner Concentrate	MMM038221 DSP	1 gallon
	MMM038222 DSP	5 gallons
	MMM038223 DSP	5 gallons
3M [®] Tire and Wheel Cleaner	MMM039036 DSP	each
3M [®] Glass Cleaner	MMM039888 DSP	19oz
3M [®] Tire dressing	MMM038127 DSP	gallon
	MMM038128 DSP	5 gallons
	MMM038129 DSP	55 gallons

Note:

For part number ordering clarification, the part number follows: Complete part number without spaces then insert DSP designation. eg. MMM008987__DSP.

CAUTION!

Part numbers are for reference only. Always check for the latest parts information.

CAUTION!

Always read and follow manufacturer Cautions and use of product.